BER0629—TRIPLE LED SPOTLIGHT OPERATING INSTRUCTIONS

Please read these instructions thoroughly, before setting up and using these lights

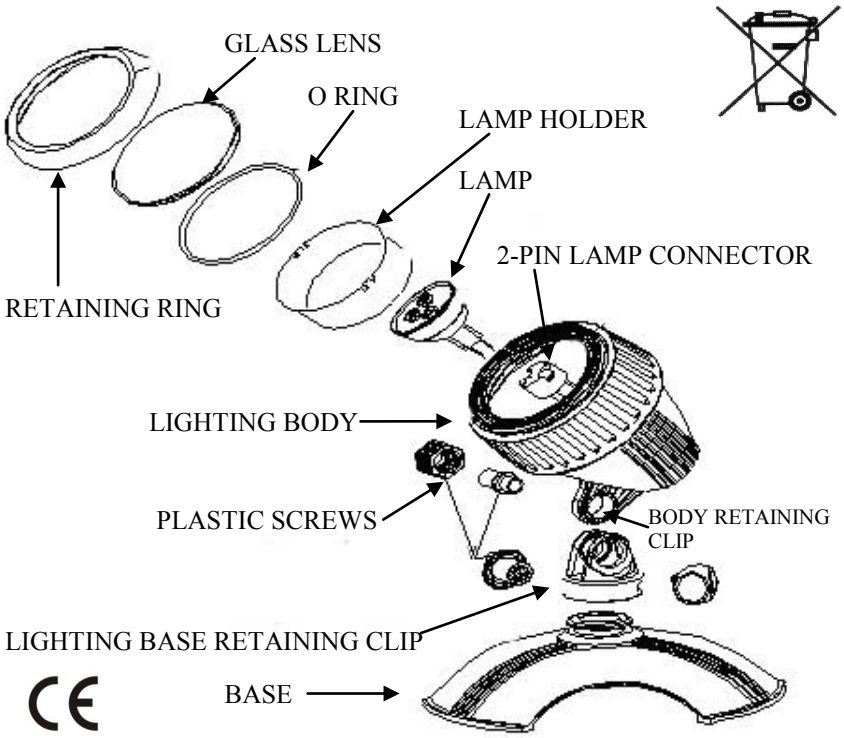

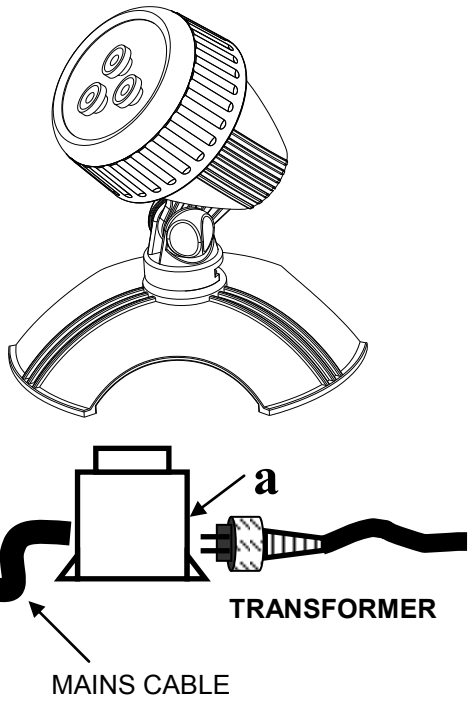

These lights are designed for use in or out of water, e.g. for garden ponds, fountains, terraced fountains, indoor fountains or around the garden.
The transformer is waterproof so can be sited outdoors, but **do not** immerse in water.
Make sure the lights are connected via the low voltage cable (a) through the transformer and NOT directly into the mains supply.
Always consult a qualified electrician or local authority if you have any doubts about wiring either via a circuit breaker or the mains supply.

ASSEMBLY INSTRUCTIONS

Position the lighting base retaining clip onto the base by pushing onto the central holder until firmly in place.
Locate the lighting body onto the base by pushing the body retaining clip between the two holes on the base retaining clip. Secure with the two plastic screw connectors. Do not over tighten the plastic screws. The lighting body unit should move up and down easily to the desired lighting angle.
Push the 2-pin connector from the lighting unit cable into the transformer and secure by screwing the sealing ring until tight. This ensures the 2-pin plug is waterproof.
WARNING: This appliance must be earthed and is designed to be permanently wired to the mains supply by way of an RCD (Residual Current Device).
Always disconnect all appliances from the electrical supply before putting your hands in the water whilst the equipment is being installed, repaired, maintained or handled. If the supply cable is damaged it cannot be replaced and the appliance should be destroyed.

LED LAMP REPLACEMENT—Please telephone the number below for replacement lamps

Unplug the transformer from the mains electricity and remove the lighting unit from the water, if submerged. Allowing sufficient time for the lighting unit to cool, push down and turn the retaining ring on the lighting unit cover anticlockwise to remove the glass lens, ensuring the O ring stays in place and is not lost during this process. Tip out the lamp and disconnect from the 2-pin lamp connector by gently pulling apart. Remove the black lamp holder from the lamp by pushing the black retaining clips on the lamp holder outward. The LED lamp unit will then detach from the black lamp holder. Re-install by reversing the process outlined above. To ensure the unit is watertight, make sure the O ring is securely in position and the cover is tightly locked.

Exclusively Distributed by
Solus Garden & Leisure Ltd
Bermuda
Berry Hill Industrial Estate
Droitwich
Worcestershire
WR9 9AB
Tel: 01905 798666
www.Bermudagarden.co.uk

GUARANTEE

THIS PRODUCT HAS A ONE YEAR GUARANTEE AGAINST MANUFACTURING DEFECTS. THE GUARANTEE COVERS THE SUBSTITUTION OF DEFECTIVE PARTS. HOWEVER, THE GUARANTEE IS CONSIDERED VOID IN THE CASE OF IMPROPER USE, IMPROPER HANDLING OR NEGLIGENCE ON THE PART OF THE BUYER. IF YOUR PRODUCT FAILS PLEASE RETURN IT TO THE RETAIL OUTLET WHERE YOU PURCHASED THE PRODUCT WITH PROOF OF PURCHASE. THE TERMS OF THIS GUARANTEE ARE IN ADDITION TO YOUR STATUTORY RIGHTS.

Find us on Facebook @ Bermuda Water Gardening